


# Flux

Specification according to EN 1307



Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Structured loop pile						
Dye method		Piece dyed continuous						
Dimensions	EN 994	cm x cm	50 x 50 / 19,68" x 19,68" (20 tiles per box)					
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	Modified bitumen Polyver®						
Pile fibre composition	ISO 2424	BCF Polyamide 6.6						
Total thickness	ISO 1765	mm	6.0	inch	0.2			
Effective pile thickness	ISO 1766	mm	3.0	inch	0.12			
Total mass	ISO 8543	g/m <sup>2</sup>	4300	oz/yd <sup>2</sup>	126.9			
Total pile mass	ISO 2424	g/m <sup>2</sup>	760	oz/yd <sup>2</sup>	22.4			
Effective pile mass	ISO 8543	g/m <sup>2</sup>	510	oz/yd <sup>2</sup>	15.1			
Pile density	ISO 8543	g/cm <sup>3</sup>	0.170	lb/in <sup>3</sup>	0.0061			
Number of tufts	ISO 1763	/dm <sup>2</sup>	2100	/yd <sup>2</sup>	175581			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 2						
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL <sub>w</sub>	ISO 10140	dB	22					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α <sub>s</sub>	0.01	0.01	0.06	0.18	0.27	0.34
Noise reduction	ISO 354	α <sub>w</sub>	0.15					
Thermal resistance	ISO 8302	m <sup>2</sup> .K/W	0.042					
Flammability	EN 13501-1	Bfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info	45ABDBAD						




Manufactured by:

Desso BV  
PO Box 169  
NL - 5140 AD Waalwijk

EN 14041  
0493-CPR-0002

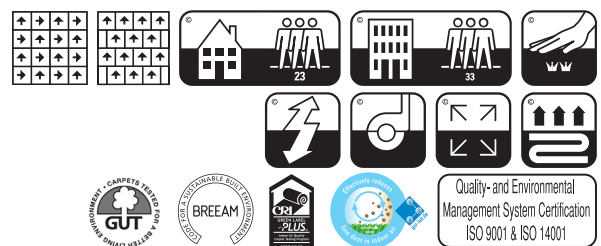

Icons include: grid patterns, house and building symbols with numbers 23 and 33, a hand icon, a lightning bolt, a circular arrow, a square with arrows, a tree icon, a BREEAM logo, a GUT logo, a CE mark, a blue circular logo, and a Quality and Environmental Management System Certification logo (ISO 9001 & ISO 14001).



**BRONZE**

Cradle to Cradle Certified<sup>®</sup> is a certification mark administered by the Cradle to Cradle Products Innovation Institute

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Desso flooring products should only be used as floorcoverings. Note: Desso reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit [www.desso.com](http://www.desso.com)