


High Performance Loop Pile Comfort Plus²®

Chicane / Comfortable Concrete / Filament / Hessian / Margin / Mono Pulse / Riverbed / Seashore

Construction	Tufted, Performance Loop Pile
Face Fibre	Nylon 6
Stain Repel / Stain Resist / Soil Release	StainSmart®
Finished Face Weight	600 gsm
Gauge	39.4 / 10 cm
Rows	39.4 / 10 cm
Tuft Density	155,000/m ²
Finished Pile Height	3.3 mm
Standard Backing	Comfort Plus ² - 90% Recycled content Polyurethane cushion Available with TractionBack® on request
Nominal Total Thickness	10.0 mm
Tile Size	457.2 x 457.2 mm
Nominal Total Weight	4000 gsm
Tiles per Box	18 (3.762 m ²)

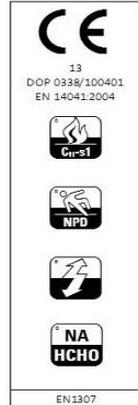

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002)	Class Cfl - s1
Flammability (Radiant Panel ASTM-E-648)	Class 1
Flammability (Hot metal nut BS4790)	Low radius of Char
Use Classification (EN1307)	Class 3 3 Heavy Commercial Use
Static Electricity (ISO 6356)	≤ 2.0 KV, Permanent Conductive Fiber
Impact Sound (ISO 140-8)	33 dB
Sound absorption (ISO 354)	0.3 Class D

ENVIRONMENTAL

90% Recycled content cushion backing
14% Recycled content by total product weight
Manufactured using electricity from renewable sources
GUT & CRI Green Label Plus certified for indoor air quality
BRE ENP422 rated certification - A/A+

Design Copyright - Milliken & Company

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.



1096



22374



ENP422




Warranties:

15 year wear warranty
Lifetime Antistatic warranty
Latent Defects warranty

Installation Method:

Monolithic



Milliken.