
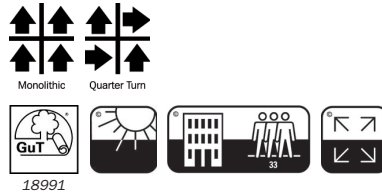


Interface® | Foyer

SPECIFICATION

Product definition	Tufted Patterned Textured Cut Tile	Style number	3057210305
Pile Material	80% Wool, 20% Nylon & Monofilament Scraper	Wear Classification	EN 1307 33 Heavy Contract
Pile Yarn Weight	1500g/m ² ± 5%	Radiant panel	(EN ISO 9239/1) Euroclass Bfl S1 (EN ISO 13501)
Total Weight	5639g/m ² ± 5%	Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)
Pile Height	6.7 mm ± 0.3 mm	Castor Chair Rating	
Total Thickness	11.2 mm ± 0.5mm	Dimensional Stability	≤ 0.2% (ISO 2551 / EN 986)
Gauge/Ends per 10cm	1/8 - 31.5	Vertical Electrical Resistance	5 x 10 ⁵ Ω >> 1 x 10 ¹⁰ Ω Computerguard (ISO 10965)
Tufts per m²	113,400 ± 5%	Colour Fastness - Light	5-6 (ISO 105/B02)
Backing Type	Graphlex®	Tiles per Box	12 - 3m ² (50 x 50 cm ± 0.2%)

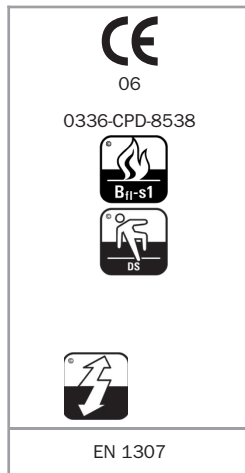

Mission Zero:
our promise to eliminate
any negative impact our company
may have on the environment
by the year 2020.

www.interface.com

Interface Europe Ltd reserve the right to change or modify specifications