


EssentialsDesigns

Dash / Catalyst / Parallels / Tangent / Textureweave / Lexicon / Ripple / Signal / Striae

Construction	Tufted, Level Loop Pile
Face Fibre	Nylon Type 6
Soil Release	Milliguard Plus® for Soil release, liquid repellence
Finished Face Weight	420 gsm
Gauge	40 / 10 cm
Rows	56 / 10 cm
Tuft Density	224,000/m ²
Finished Pile Height	3.0 mm
Standard Backing	90% Recycled content Polyurethane cushion Available with TractionBack® on request
Nominal Total Thickness	8.8 mm
Tile Size	457.2 x 457.2 mm
Nominal Total Weight	3700 gsm
Tiles per Box	20 (4.18 m ²)

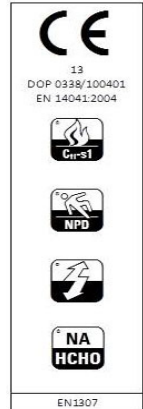

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002)	Class Cfl - s1
Flammability (Radiant Panel ASTM-E-648)	Class 1
Flammability (Hot metal nut BS4790)	Low radius of Char
Use Classification (EN1307)	Class 3 3 Heavy Commercial Use
Static Electricity (ISO 6356)	≤ 2.0 KV, Permanent Conductive Fiber
Impact Sound (ISO 140-8)	30 dB
Sound absorption (ISO 354)	0.3 Class D

ENVIRONMENTAL

90% Recycled content cushion backing
11% Recycled content by total product weight
GUT & CRI Green Label Plus certified for indoor air quality
BRE ENP422 Certification - A/A+

Design Copyright - Milliken & Company

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.



1096



22373



ENP422




Warranties:

- 12 year wear warranty
- Lifetime Antistatic warranty
- Latent Defects warranty

Installation Method:

Monolithic



Milliken