

# ATLAS

## Technical details

Manufacturing method	Tufted
Pile type	Frisé Heatset Twist - Cutpile
Special treatment KLEENAWAY	Yes
Dyeing method	Piece Dyed
Pile content	100% Polyamide (Nylon)
Gauge	1/8
Backing	Action Backing
Pile weight	ca. 1250 gr/m <sup>2</sup>
Pile height	ca. 6,0 mm
Total Thickness	ca. 7,5 mm
Total weight	ca. 2280 gr/m <sup>2</sup>
Tuft density	ca. 146 000/m <sup>2</sup>
Width	4 m
Flammability classification	Cfl S1 according to EN13501-1
Electrostatic properties	Walking Test < 2,0 KV Resistance ≥ 10 <sup>10</sup>
Suitability	EN1307 - 32 - Commercial Heavy
Sound absorption	27 dB - ISO 140-8
Colour fastness : To light	≥ 7 according to ISO 105-B02
To rubbing	≥ 4 according to ISO 105-X12

## Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.

This carpet must be sold and installed in accordance with BS5325. Chair mats are recommended for use under castor chairs.


All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

## Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "water-marking".

The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.

We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.

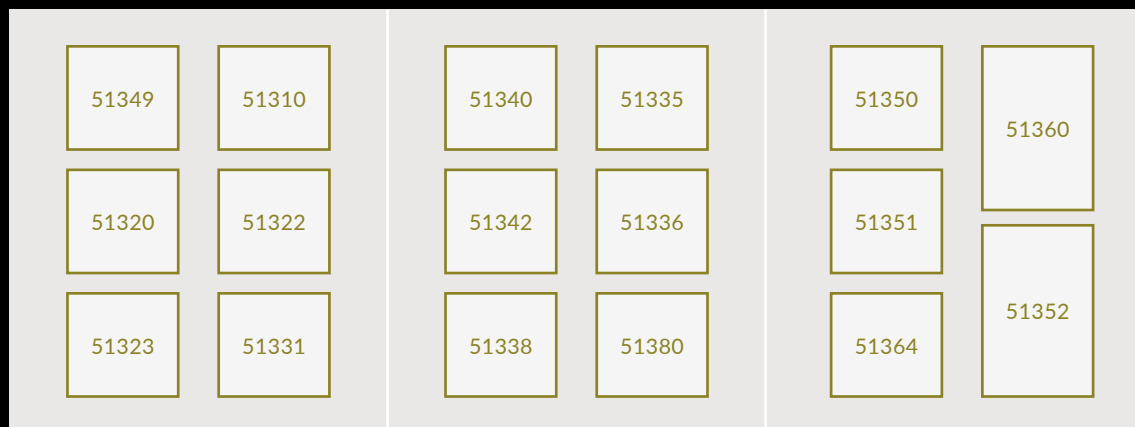

TÜV Emission testing - The results comply with the emission threshold of:

AgBB - Germany  
Belgian VOC regulation  
BREEAM Exemplary level

French VOC regulation  
LEED V4 (outside North America)



16

EN 1307

Manufactured by: TAPIBEL nv.  
Industrielaan 4 - B-3900 Overpelt  
DOP 000513A-002 - EN 14041

ATLAS (Action Backing)  
For use as floor covering in buildings  
(EN 14041) according to the manufacturer's specifications

[www.tapibel.be](http://www.tapibel.be) - [sales@tapibel.be](mailto:sales@tapibel.be)

Tel : +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium