

**DOPNUMMER: 1104/117705**


Fabriekatiemethode	Vlak geweven, lussenpool	
Mode de fabrication	Tissé plat, velours bouclé	
Herstellungsverfahren	Flach gewebt, Schlinge	
Manufacturing process	Flat woven, loop pile	
Samenstelling van de pool		
Composition du velours	100 % sisal	
Nutzschicht		
Pile composition		
Rug		
Dossier	latex (code 20)	
Rücken		
Secondary backing		
Totale hoogte		
Hauteur totale	5,5 mm	
Gesamthöhe		
Total height		
Poolgewicht		
Poids du velours	1350 g/m <sup>2</sup>	
Polgewicht		
Pile weight		
Totaal gewicht		
Poids total	1875 g/m <sup>2</sup>	
Gesamtgewicht		
Total weight		
Breedte		
Largeur	ca. 400 cm	
Breite		
Width		
Lengte		
Longueur	ca. 30 m	
Länge		
Length		
Warmte isolatie		
Résistance à la conductibilité de chaleur	DIN 52612 0,049 m <sup>2</sup> K/W	
Wärmedurchlasswiderstand		
Resistance of heat conduction		
Tog Rating	0,49	
Geluidsisolatie		
Isolation aux bruits	25 db	
Sound insulation		
Schallabsorptions		
Gebruik	Zwaar huishoudelijk gebruik	Medium contract gebruik
Utilisation	Usage domestique intensif	Usage professionnel medium
Verwendungsbereich	Schwere Beanspruchung	Medium Projekt
Suitability	Heavy domestic	General commercial

Leverbaar als rol en als coupon / Livrable en rouleaux et à la coupe / als Rolle und im Coupon lieferbar / available in rolls and cutlengths

Bij verlijming : enkel gebruik van EC1-lijmen ! / En cas de pose collée : seulement utilisation des colles EC1 !

Bei geklebter Verlegung : nur EC1-Klebstoffe verwenden ! / In case of adhesion : only use of EC1 glues !

We reserve the right to modify the characteristics of this product for quality improvement.

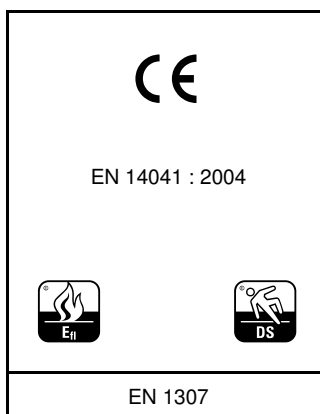

on request



GARANTIE  
WAARBORG  
**5**  
GARANTEE

