



## **Reclaim Ribs**

Specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1	/10 "						
Aspect	ISO 2424			Loop pile						
Dye method	100 2121		Solution							
Dimensions	EN 994	EN 994 cm x cm		50 x 50 / 19,68" x 19,68" (20 tiles per box)						
Primary backing	ISO 2424		Polyester fleece							
Secondary backing	ISO 2424		Modified bitumen Polyver <sup>®</sup> - Polyscan <sup>®</sup>							
Pile fibre composition	ISO 2424		BCF Polyamide 6 and ECONYL <sup>®</sup> (ECONYL <sup>®</sup> is made from 100% regenerated content) **							
Total thickness	ISO 1765	mm	6.5		inch	0.3				
Effective pile thickness	ISO 1766	mm	3.5		inch	0.14				
Total mass	ISO 8543	g/m²	4250		oz/yd²	125.4				
Total pile mass	ISO 2424	g/m²	670		oz/yd²	19.8				
Effective pile mass	ISO 8543	g/m²	540		oz/yd²	15.9				
Pile density	ISO 8543	g/cm³	0.154		lb/in <sup>3</sup>	0.0056				
Number of tufts	ISO 1763	/dm²	1540		/yd²	128759				
Stroll test	ISO 6356	kV	≤ 2,0							
Vertical resistance	ISO 10965	Ohm	≤ 1 x 10	9						
Horizontal resistance	ISO 10965	Ohm	≤ 1 x 10	9						
Use classification	EN 1307		33 Commercial - heavy use							
Luxury rating	EN 1307		LC 2							
Dimensional stability	EN 986	%	≤ 0,2							
Impact sound reduction $\Delta L_w$	ISO 10140	dB	25							
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000		
		α	0.00	0.03	0.08	0.17	0.31	0.37		
Noise reduction	ISO 354	a	0.20							
Thermal resistance	ISO 8302	m².K/W	0.050							
Flammability	EN 13501-1	EN 13501-1		Bfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.	www.pro-dis.info			EC8C8BEB					



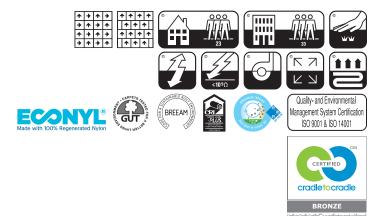

\*\* ECONYL<sup>®</sup> is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL<sup>®</sup> and the exact % thereof can be found on our website: www.desso.com.

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Desso flooring products should only be used as floorcoverings. Note: Desso reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit www.desso.com