


Trax

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "							
Aspect	ISO 2424	Loop pile							
Dye method	Space dyed + solution dyed								
Width	CEN/TS 14159	cm	400 / 13' 1.5"						
Primary backing	ISO 2424	Polyester - polyamide fleece							
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing							
Pile fibre composition	ISO 2424	BCF Polyamide 6							
Total thickness	ISO 1765	mm	6.0	inch			0.24		
Effective pile thickness	ISO 1766	mm	3.3	inch			0.13		
Total mass	ISO 8543	g/m²	2000	oz/yd²			59.0		
Total pile mass	ISO 2424	g/m²	625	oz/yd²			18.4		
Effective pile mass	ISO 8543	g/m²	500	oz/yd²			14.8		
Pile density	ISO 8543	g/cm³	0.150	lb/in³			0.0054		
Number of tufts	ISO 1763	/dm²	1540	/yd²			128759		
Stroll test	ISO 6356	kV	≤ 2.0						
Vertical resistance	ISO 10965	Ohm	-						
Horizontal resistance	ISO 10965	Ohm	-						
Classification for use	EN 1307	33 Commercial - heavy use							
Luxury rating	EN 1307	LC 2							
Impact sound reduction ΔL _w	ISO 140-8	dB	25						
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000	
		α _s	0.01	0.03	0.07	0.16	0.46	0.59	
Noise reduction	ISO 354	α _w	0.H)						
Thermal resistance	ISO 8302	m².K/W	0.053						
Flammability	EN 13501-1	Bfl - s1							

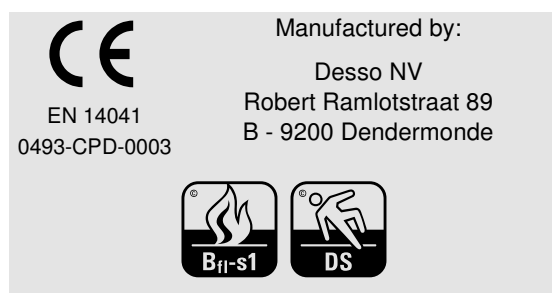

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards.
 An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level.
 Desso flooring products should only be used as floorcoverings.
 Note: Desso reserves the right to amend this specification without giving prior notice.
 For the latest versions of the technical specifications, check our internet site: www.desso.com