


# Highline 1100 on WT - Woven textile

## Product description

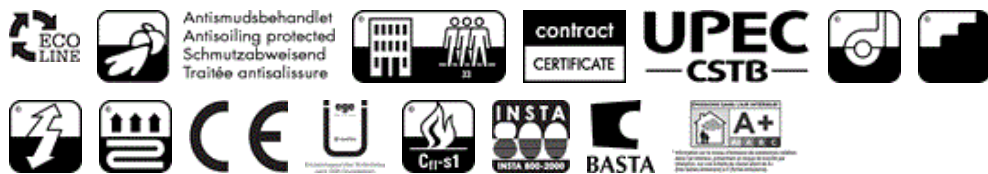

Product description	Methods	Product data
<b>Construction</b>		
Structure	ISO 2424	Tufted cut pile
Gauge	ISO 2424	1/8
Pile material	DIR 96/73, 96/74	100% Recycled Econyl Polyamide
Coloration	-	Millitron
Backing	eTL	WT - Woven textile
Dimensions	ISO 3018	Approx. 400 cm
Total thickness	.	0.32"
	ISO 1765	Ca. 8,0 mm.
Surface pile thickness	ISO 1766	Ca. 5,5 mm.
Tufts	ISO 1763	Ca. 199.000 pr.m2
Total carpet weight	ISO 8543	Ca. 2.550 g/m2
	.	75.2 oz./yd2
Pile yarn weight	eTL	1.100 g/m2
	.	32.45 oz./yd2
Surface pile density	ISO 8543.	Ca. 0,155 g/cm3
ege soil protection	eTL	Yes

### Performance ratings

Performance areas	EN 1307	Class 33 Commercial - Heavy
Wear guarantee	eTL	Contract certificate
Performance areas	Gulvbranchen	Klasse 33
	UPEC	U3s P3 E1 C0
	UPEC approval No.	12/290
Castor chair suitability	EN 985	Yes, constant use
Suitable for use on stairs	EN 1963	Yes
Static control	eTL	Permanently antistatic
Body walking test	EN 1815	Antistatic
Acou.insu. from impact noise	EN ISO 717-2	27 dB
Acoustical absorption	ISO 354	0,20 aW
Suitable for underfloorheating	ISO 8302	Yes
Light reflectance	eTL	Testreport
Colour fastness to Light	ISO 105-B02	>5
	AATCC 16	5.0
Colour fastness to rubbing wet	EN ISO 105-X12	>3
	AATCC 165	5.0
Colour fastness to Rubbing Dry	EN ISO 105-X12	>3-4
	AATCC 165	5.0
Colourfast. to Water Patterned	EN ISO 105-E01	>4
Cleaning	AATCC 138	5.0
Colour fastness to Ozone	AATCC 129	5.0
Colour fast.Oxides of Nitrogen	AATCC 164	5.0
Other performance tests	Golf Spike Resistance Test	3,2
	ASTM D5252 Hexapod	4.0/ 4.0
	-	Commercial - Heavy
	AATCC 134 Electrostatic propensity	3.1 kV

### Safety & Environment

**ege**<sup>®</sup>

design · quality · respect

Product description	Methods	Product data	
CE Labeling	EN 14041	Certified	
EC Certificate	EN 14041	2531-CPR-CXA10004C	
CE Labeling	Declaration of Performance	DOP 9711-4C	
Fire classification	DK,MK GODKENDELSE	Godkendt	
	D,DIBT AbZ.no.	Z-156.601-441	
	CH,VKF/AEAI	Cfl-s1	
	BS 6853, NF X 70-100	Approved	
	ASTM E-648	Class 1	
	ASTM E662 Smoke Density	<450	
	ASTM D2859 Surface Flamm.	Pass	
	CAN,ULC-S102.2	FSC1 66	
	PL, Polen std.	OK	
	EN13501-1 euro class	Cfl-s1	
	HU,MSZ 14800-9:1985	Suitable	
	China	Cfl-s1,t0	
	Indoor air	DIM Certifikat	No.006
		INSTA 800	Dust level 5
BASTA		Registered	
Green Label Plus		Approved	
GreenLabel Singapore		Approved	
Emissions dans l'air intérieur		A+/A+	
Environmental Choice NZ		Approved	
GECA		Approved	
Environment		BRE	ENP 434
		Byggvarudeklaration	BVD 3
	BREEAM-NOR	Approved	
	Environmental Product Decl.	EPD-EGE-2013103-CBC1-EN	
	Recycled Content, ISO 14021	Ca. 42 %	
	Recycled Content for LEED	Ca. 32 %	
LEED	Qualified		

### Guides

Installation+adhensive guide	DK	Dansk
	N	Norsk
	S	Svensk
	GB	English
	D	Deutsch
	F	Francais
Cleaning, stain removal	DK	Dansk
	N	Norsk
	S	Svensk
	GB	English
	D	Deutsch
	F	Francais

### Manufacturer

Factory certification	ISO 9001	Audited and verified by BVC
	ISO 14001	Audited and verified by BVC

**Product description****Methods****Product data**

---

EMAS

Audited and verified by BVC

OHSAS

Audited and verified by BVC

DS 49001

Audited and verified by BVC

CRuk

Member of Carpet Recycling  
UK

TransQ

Qualified