


GRANITE

Technical details

Manufacturing method	Tufted
Pile type	Loop pile
Special treatment Kleenaway	Yes
Dyeing method	Space Dyed
Pile content	100% ECONYL® regenerated Polyamide
Gauge	1/10
Backing	Action Backing
Pile weight	ca. 800 gr/m ²
Pile height	ca. 5,0 mm
Total thickness	ca. 6,5 mm
Total weight	ca. 1850 gr/m ²
Tuft density	ca. 159 000/m ²
Width	4 m
Flammability classification	Bfl S1 according to EN13501-1
Electrostatic properties	Walking Test < 2,0 KV Resistance ≥ 10 ¹⁰
Suitability	EN1307 - 33 - Heavy Commercial
Sound absorption rate	αw - ca 0,20 acc. to ISO 354
Castor chair suitability	Class A according to EN 985: 2001 Test A
Impact sound insulation	ΔLw - 25 dB acc. ISO 10140-1 ΔL - 46,1 dB at 1000 Hz acc. ISO 10140-1
Colour fastness : To light	≥ 7 according to ISO 105-B02
To rubbing	≥ 4 according to ISO 105-X12
Stairs suitability	use in stairs "commercial use" acc. to EN 1963

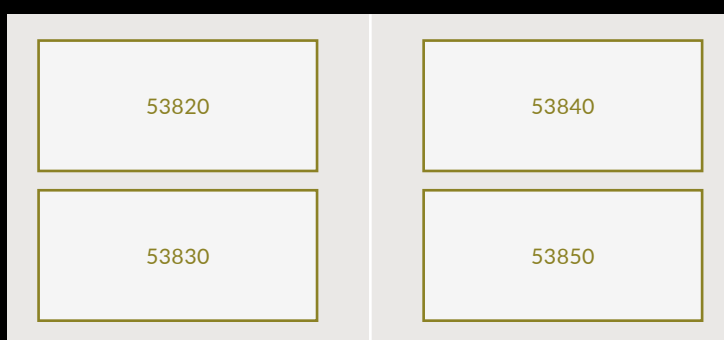

TÜV Emission testing - The results comply with the emission threshold of:
 AgBB - Germany
 Belgian VOC regulation
 BREEAM Exemplary level
 French VOC regulation
 LEED V4 (outside North America)



Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.

This carpet must be sold and installed in accordance with BS5325. Chair mats are recommended for use under castor chairs.

All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "water-marking".

The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.

We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.



16

EN 1307

Manufactured by: TAPIBEL nv.
 Industrielaan 4 - B-3900 Overpelt
 DOP 000538A-001 - EN 14041

GRANITE (Action Backing)
 For use as floor covering in buildings
 (EN 14041) according to the manufacturer's specifications

www.tapibel.be - sales@tapibel.be

Tel : +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium