


# MILANO

## Technical details

Manufacturing method	Tufted
Pile type	Velours
Anti soil treatment	Yes
Dyeing method	Solution Dyed
Pile content	100% Polyamide
Gauge	1/10
Backing	Action Backing
Pile weight	ca. 800 gr/m <sup>2</sup>
Pile height	ca. 4,5 mm
Total thickness	ca. 6,5 mm
Total weight	ca. 2050 gr/m <sup>2</sup>
Tuft density	ca. 223000/m <sup>2</sup>
Width	4 m
Flammability classification	BS 4790 Low Radius of Effects of Ignition CFL S1 according to EN 13501-1
Electrostatic properties	≤ 10 <sup>10</sup> according to ISO 10965
Suitability	BS 7131 (1) Heavy Contract EN1307 - 33 - Heavy Commercial
Comfort Class	LC2 according to EN 1307
Sound absorption	27 dB - ISO 140-8
Colour fastness :	To light ≥ 7 according to ISO 105-B02 To rubbing 3 - 4 according to ISO 105-X12
Bleach resistance	Yes

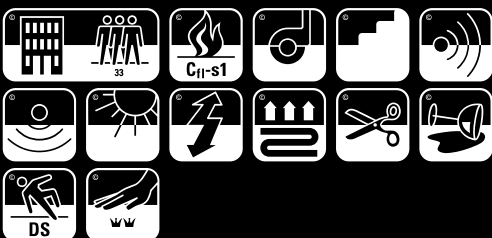

13

EN 1307

Manufactured by: TAPIBEL nv.  
Industrielaan 4 - B-3900 Overpelt  
DOP 000477A-001 - EN 14041

MILANO (Action Backing)  
For use as floor covering in buildings  
(EN 14041) according to the manufacturer's  
specifications

TÜV Emission testing - The results comply with the emission threshold of:

AgBB - Germany  
Belgian VOC regulation  
BREEAM Exemplary level

French VOC regulation  
LEED V4 (outside North America)



also available  
in tiles

[www.tapibel.be](http://www.tapibel.be) - [sales@tapibel.be](mailto:sales@tapibel.be)

Tel : +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium