


Filament,Filament,P1446

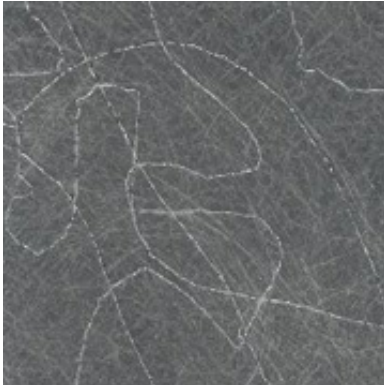

Due to variations in PC monitors the colour displayed may vary from actual product. Please order a free sample for exact colour match.

Product Detail

Width	100 cm
Width	100 cm
Weight	350 gsm
Weight	350 gsm
Fire rating	Euro Class B
Fire rating	Euro Class B
LRV Value	24
LRV Value	24
VOC Rating	A+
VOC Rating	A+
VOC Certificate	W11/09/11
VOC Certificate	W11/09/11
Cleanability	EN235 Washable
Cleanability	EN235 Washable
Lightfastness	Excellent. (7 out of 8 to BSEN20105)
Lightfastness	Excellent. (7 out of 8 to BSEN20105)
Recommended Adhesive	Murabond Heavy. On dry lining use Murabond Easy Strip. On sealed surfaces use Murabond Sealed Surface Adhesive. For other surfaces contact Customer Services on 08705 117 118.
Recommended Adhesive	Murabond Heavy. On dry lining use Murabond Easy Strip. On sealed surfaces use Murabond Sealed Surface Adhesive. For other surfaces contact Customer Services on 08705 117 118.
Pattern Repeat	0
Pattern Repeat	0
Pattern Offset	0
Pattern Offset	0
Pattern Overlap	5
Pattern Overlap	5
Hanging Type	By Reverse Hanging
Hanging Type	By Reverse Hanging

If you require further information about any Muraspac product or service please contact our Customer Service Team
United Kingdom +44 (0)8705 117 118
UK Export +44 (0)1442 270555
United Arab Emirates +971 4 338 7399

France +33 1 41 32 29 00
Poland +48 22 648 4467