Una Tinta Ecotrust

Product Description





ECO
TRUST

Antismudsbehandlet
Antisailing protected
Schmutzabweisend
Traitée antisalissure






















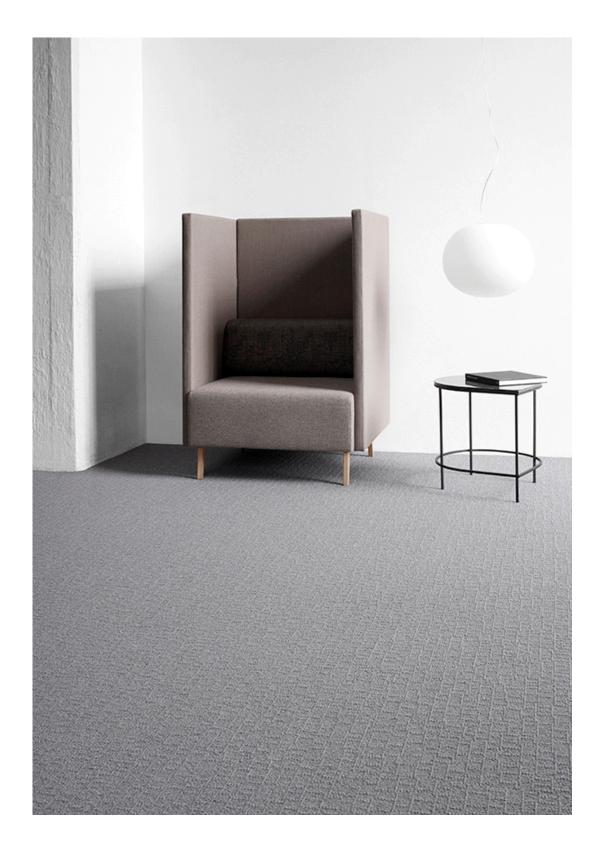



18/04/2017 Page: 1

Product description	Methods	Product data
Construction characteristics		
Structure	ISO 2424	Tufted loop pile - structured
Gauge	ISO 2424	1/12
Pile material	DIR 96/73, 96/74	100% polyamide
Coloration	-	Solution dyed
Backing	eTL	Ecotrust 350, 100% recycled
Dimensions	ISO 3018	48x48/96x96cm/Figura
Total thickness	ISO 1765	Apr 9,5 mm.
		0.37""
Surface pile thickness	ISO 1766	Apr 6,0 mm.
Tufts	ISO 1763	Apr 249.100 pr.m2
Total carpet weight	ISO 8543	Apr 3.150 g/m2
	·	92.93 oz./yd2
Pile yarn weight	eTL	950 g/m2
	·	28.03 oz./yd2
Surface pile density	ISO 8543.	Apr 0,145 g/cm3
Soil protection	eTL	Yes
Performance characteristics		
Performance areas	EN 1307	Class 33 - Commercial - Heavy
Guarantee	eTL	Contract certificate
Castor chair suitability	EN 985	Intensive use
Suitability for use on stairs	EN 1963	Yes
Static control	eTL	Permanently antistatic
Body walking test	ISO 6356	Antistatic
Acou.insu. from impact noice	eTL	28 dB
Acoustical absorption	eTL	0,25 aW
Suitability underfloorheating	eTL	Apr 0,16 m2K/W
Colour fastness to light	ISO 105-B02	>5
Colour fastness to rubbing wet	ISO 105-X12	>3
Colour fastness to rubbing dry	ISO 105-X12	>3-4
Colourfast. to water patterned	ISO 105-E01	>4
Safety & Environment		
Fire classification	VKF/AEAI	Approved
	EN 13501-1 Euroclass	Bfl-s1
	RUSSIA	Approved
CE Labeling	EN 14041	Certified
	CPR	1021-CPR-009-1/16
	Declaration of Performance	DOP 5B-PA-ECT350
	Notified body no.	1021
	Ce Year	16
	Content of PCP EN 12673	DL
	Formaldehyde emission	NA
	Slip resistance EN 13893	Class DS
Indoor climate	DIM certificate	No. 006
Environment	Cradle To Cradle Certified	Ecotrust, bronze Certified

18/04/2017 Page: 2

Product description	Methods	Product data
Installation + adhesive guide	DK	Dansk
	N	Norsk
	S	Svensk
	GB	English
	D	Deutsch
	F	Français
Installation tiles	Direction of installation	Quarter turn/ monolithic
Cleaning, stain removal	DK	Dansk
	N	Norsk
	S	Svensk
	GB	English
	D	Deutsch
	F	Francais
Manufacturer characteristics		
Factory certification	ISO 9001	Audited and verified by BVC
	ISO 14001	Audited and verified by BVC
	EMAS	Audited and verified by BVC
	DS/OHSAS	Audited and verified by BVC
	DS 49001	Audited and verified by BVC
	CRuk	Member of Carpet Recycling UK
	TransQ	Qualified

