

WOOLMATCH

Technical details

Manufacturing method	Tufted
Pile type	Cutpile
Special treatment KLEENAWAY	Yes
Pile content	25 % PP - 75 % Woolblend
Gauge	1/8
Backing	Action Backing
Pile weight	ca 1200 gr/m ²
Pile height	ca 7,0 mm
Total weight	ca 2400 gr/m ²
Tuft density	ca. 150000 /m ²
Width	4 m
Flammability classification	Cfl S1 according to EN13501-1
Electrostatic properties	Walking Test < 2,0 KV Resistance > 10 ¹⁰
Suitability	EN 1307 - Class 31 - Commercial Moderate
Sound absorption	24dB ISO 140-8
Colour fastness : To light	> 4 according to ISO 105-B02
To rubbing	4-5 according to ISO 105-X12

Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.

This carpet must be sold and installed in accordance with BS5325. Chair mats are recommended for use under castor chairs.


All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "water-marking".

The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.

We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.

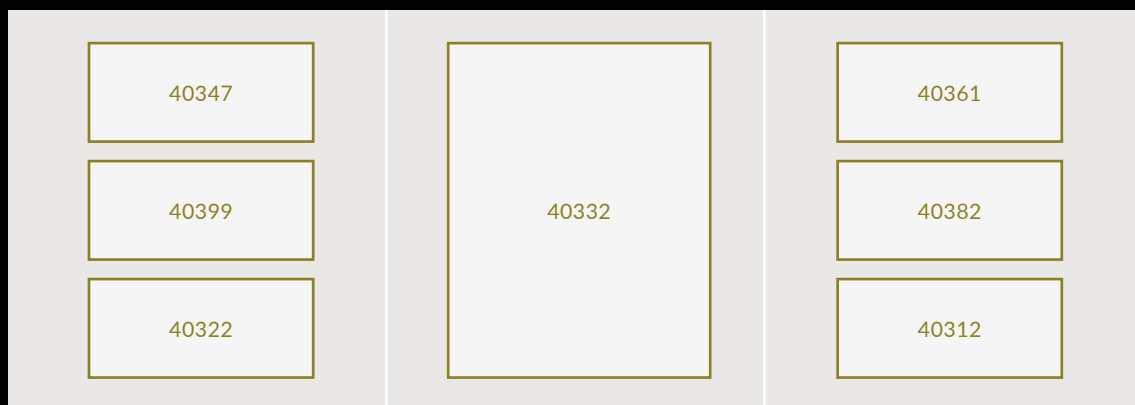

Woolmatch is manufactured using recycled random woollen yarns alongside new low environmental impact manmade fibres. Owing to their random nature the woollen yarns may vary in shade through the length of the roll, this is an essential part of the attraction of Woolmatch and cannot be considered as a cause for dissatisfaction. Similarly while the overall colour tones of these samples will remain similar each roll is unique.



13

EN 1307

Manufactured by: TAPIBEL nv.
Industrielaan 4 - B-3900 Overpelt
DOP 000403 - EN 14041



WOOLMATCH

For use as floor covering in buildings
(EN 14041) according to the manufacturer's specifications

www.tapibel.be - sales@tapibel.be

Tel : +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium

Tapibel